

# **EPS2U**

## **Power Supply Design Guide**

*A Server System Infrastructure (SSI) Specification  
For Entry Chassis Power Supplies*

**Version 1.2**

**Disclaimer:**

THIS SPECIFICATION IS PROVIDED "AS IS" WITH NO WARRANTIES WHATSOEVER, INCLUDING ANY WARRANTY OF MERCHANTABILITY, NONINFRINGEMENT, FITNESS FOR ANY PARTICULAR PURPOSE, OR ANY WARRANTY OTHERWISE ARISING OUT OF ANY PROPOSAL, SPECIFICATION OR SAMPLE. WITHOUT LIMITATION, THE PROMOTERS (Intel Corporation, NEC Corporation, Dell Computer Corporation, Data General a division of EMC Corporation, Compaq Computer Corporation, Silicon Graphics Inc., and International Business Machines Corporation) DISCLAIM ALL LIABILITY FOR COST OF PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES, LOST PROFITS, LOSS OF USE, LOSS OF DATA OR ANY INCIDENTAL, CONSEQUENTIAL, DIRECT, INDIRECT, OR SPECIAL DAMAGES, WHETHER UNDER CONTRACT, TORT, WARRANTY OR OTHERWISE, ARISING IN ANY WAY OUT OF USE OR RELIANCE UPON THIS SPECIFICATION OR ANY INFORMATION HEREIN.

The Promoters disclaim all liability, including liability for infringement of any proprietary rights, relating to use of information in this specification. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted herein.

This specification and the information herein is the confidential and trade secret information of the Promoters. Use, reproduction and disclosure of this specification and the information herein is subject to the terms of the S.S.I. Specification Adopter's Agreement.

Copyright © Intel Corporation, Dell Computer Corporation, Compaq Computer Corporation, Silicon Graphics Inc., International Business Machines Corporation, 2000.

## Contents

<b>1</b>	<b>Purpose .....</b>	<b>5</b>
<b>2</b>	<b>Conceptual Overview.....</b>	<b>5</b>
<b>3</b>	<b>Definitions/Terms/Acronyms.....</b>	<b>6</b>
<b>4</b>	<b>Mechanical Overview.....</b>	<b>7</b>
4.1	Airflow Requirements.....	8
4.2	Temperature Requirements.....	8
<b>5</b>	<b>AC Input Requirements.....</b>	<b>9</b>
5.1	AC Inlet Connector .....	9
5.2	AC Input Voltage Specification .....	9
5.3	Efficiency .....	9
5.4	AC Line Dropout .....	10
5.5	AC Line Fuse .....	10
5.6	AC Inrush.....	10
5.7	AC Line Transient Specification .....	11
5.8	AC Line Fast Transient Specification .....	11
<b>6</b>	<b>DC Output Specification .....</b>	<b>12</b>
6.1	Output Connectors .....	12
6.1.1	Required Baseboard power connector .....	12
6.1.2	Required Processor Power Connector .....	12
6.1.3	Required Peripheral Power Connectors .....	13
6.1.4	Required Floppy Power Connector .....	13
6.1.5	Optional Server Signal Connector .....	13
6.2	Grounding .....	14
6.3	Remote Sense .....	14
6.4	Output Power/Currents .....	15
6.4.1	Standby Outputs.....	15
6.5	Voltage Regulation .....	16
6.6	Dynamic Loading.....	17
6.7	Capacitive Loading .....	18
6.8	Ripple / Noise.....	18
6.9	Timing Requirements.....	19
<b>7</b>	<b>Protection Circuits.....</b>	<b>22</b>
7.1	Current Limit .....	22
7.2	240VA Protection .....	22
7.3	Over Voltage Protection.....	23
7.4	Over Temperature Protection .....	23
<b>8</b>	<b>Control and Indicator Functions.....</b>	<b>24</b>
8.1	PSO# .....	24
8.2	PWOK (Power OK).....	25
8.3	Field Replacement Unit (FRU) Signals.....	26
8.3.1	FRU Data.....	26
8.3.2	FRU Data Format .....	26

<b>9</b>	<b>MTBF .....</b>	<b>28</b>
<b>10</b>	<b>Agency Requirements .....</b>	<b>28</b>

## Figures

Figure 1: Enclosure Drawing.....	7
Figure 2: Output Voltage Timing .....	19
Figure 3: Turn On/Off Timing (Single Power Supply) .....	21
Figure 4: PSON# Signal Characteristics .....	24

## Tables

Table 1: Thermal Requirements.....	8
Table 2: AC Input Rating .....	9
Table 3: AC Line Sag Transient Performance .....	11
Table 4: AC Line Surge Transient Performance .....	11
Table 5: P1 Baseboard Power Connector .....	12
Table 6: Processor Power Connector .....	12
Table 7: Peripheral Power Connectors .....	13
Table 8: P9 Floppy Power Connector .....	13
Table 9: Server Signal Connector .....	13
Table 10: 480 W Load Ratings .....	15
Table 11: Voltage Regulation Limits .....	16
Table 12: Optional +5V Regulation Limits .....	16
Table 13: Transient Load Requirements .....	17
Table 14: Capacitive Loading Conditions .....	18
Table 15: Ripple and Noise .....	18
Table 16: Output Voltage Timing.....	19
Table 17: Turn On/Off Timing .....	20
Table 18: Over Current Protection.....	22
Table 19: Over Current Protection.....	23
Table 20: Over Voltage Limits.....	23
Table 21: PSON# Signal Characteristic.....	24
Table 22: PWOK Signal Characteristics .....	25
Table 23: FRU Device Information .....	26
Table 24: FRU Device Product Information Area .....	26
Table 25: FRU Device Product Information Area .....	27

## 1 Purpose

This 2U Rack Power Supply Specification defines a common power supply used in entry-level servers. This supply may range typically from 400 to 700 watts and is used in a non-redundant configuration. The scope of this document defines the requirements for one supply in this power range. The parameters of this supply are defined in this specification for open industry use.

This specification defines a 480 W power supply with 6 outputs; 3.3 V, 5 V, 12V1, 12V2, -12 V, and 5 VSB. Because of its connector leads, the power supply is not intended to be a hot swap type of power supply.

## 2 Conceptual Overview

In the Entry server market, the bulk power system must source power on several output rails.

These rails are typically as follows:

- +3.3 V
- +5 V
- +12 V
- -12 V
- 5 V standby

### NOTE

*Local DC-DC converters shall be utilized for processor power, and will ideally convert power from the +12 V rail, however, they may also convert power from other rails.*

The bulk power system may be a n+1 redundant power system or a non-redundant power system.

## 3 Definitions/Terms/Acronyms

<b>Required</b>	The status given to items within this design guide, which are required to meet SSI guidelines and a large majority of system applications.
<b>Recommended</b>	The status given to items within this design guide which are not required to meet SSI guidelines, however, are required by many system applications.
<b>Optional</b>	The status given to items within this design guide, which are not required to meet SSI guidelines, however, some system applications may optionally use these features.
<b>Autoranging</b>	A power supply that automatically senses and adjusts itself to the proper input voltage range (110 VAC or 220 VAC). No manual switches or manual adjustments are needed.
<b>CFM</b>	Cubic Feet per Minute (airflow).
<b>Dropout</b>	A condition that allows the line voltage input to the power supply to drop to below the minimum operating voltage.
<b>Latch Off</b>	A power supply, after detecting a fault condition, shuts itself off. Even if the fault condition disappears, the supply does not restart unless manual or electronic intervention occurs. Manual intervention commonly includes briefly removing and then reconnecting the supply, or it could be done through a switch. Electronic intervention could be done by electronic signals in the Server System.
<b>Monotonically</b>	A waveform changes from one level to another in a steady fashion, without intermediate retracement or oscillation.
<b>Noise</b>	The periodic or random signals over frequency band of 0 Hz to 20 MHz.
<b>Overcurrent</b>	A condition in which a supply attempts to provide more output current than the amount for which it is rated. This commonly occurs if there is a "short circuit" condition in the load attached to the supply.
<b>PFC</b>	Power Factor Corrected.
<b>Ripple</b>	The periodic or random signals over a frequency band of 0 Hz to 20 MHz.
<b>Rise Time</b>	Rise time is defined as the time it takes any output voltage to rise from 10% to 95% of its nominal voltage.
<b>Sag</b>	The condition where the AC line voltage drops below the nominal voltage conditions.
<b>Surge</b>	The condition where the AC line voltage rises above nominal voltage.
<b>VSB or Standby Voltage</b>	An output voltage that is present whenever AC power is applied to the AC inputs of the supply.
<b>MTBF</b>	Mean time between failure.
<b>PWOK</b>	A typical logic level output signal provided by the supply that signals the Server System that all DC output voltages are within their specified range.



## 4.1 Airflow Requirements

STATUS
<b>Recommended</b>

The power supply shall have a two-speed fan(s) and provide cooling to both the supply and the system. , During low-speed fan operation, the power supply must not exceed a noise level of 43 dBA measured at one meter on all faces. At low fan speed, the power supply shall provide a minimum of 12 CFM of airflow with 0.003 inH<sub>2</sub>O of system backpressure. At high fan speed, the power supply shall provide a minimum of 20 CFM with 0.006 inH<sub>2</sub>O of system backpressure.

## 4.2 Temperature Requirements

STATUS
<b>Recommended</b>

The power supply shall operate within all specified limits over the T<sub>op</sub> temperature range. The average air temperature difference ( $\Delta T_{ps}$ ) from the inlet to the outlet of the power supply shall not exceed the values shown below in Table 1. All airflow shall pass through the power supply and not over the exterior surfaces of the power supply.

**Table 1: Thermal Requirements**

ITEM	DESCRIPTION	MIN	MAX	UNITS
T <sub>op</sub>	Operating temperature range.	0	45	°C
$\Delta T_{ps}$	Temperature rise from inlet air to outlet air of power supply. 480 W output power, 20 CFM, Sea level, 25 °C inlet air		21	°C
	480 W output power, 12 CFM, Sea level, 25 °C inlet air		35	°C
T <sub>non-op</sub>	Non-operating temperature range.	-40	70	°C

The power supply must meet UL enclosure requirements for temperature rise limits. All sides of the power supply with exception to the air exhaust side, must be classified as “Handle, knobs, grips, etc. held for short periods of time only”.

## 5 AC Input Requirements

STATUS
<b>Required</b>

The power supply shall incorporate universal power input with active power factor correction, which shall reduce line harmonics in accordance with the EN61000-3-2 and JEIDA MITI standards.

### 5.1 AC Inlet Connector

STATUS
<b>Required</b>

The AC input connector shall be an IEC 320 C-14 power inlet. This inlet is rated for 15 A/250 VAC.

### 5.2 AC Input Voltage Specification

STATUS
<b>Required</b>

The power supply must operate within all specified limits over the following input voltage range. Harmonic distortion of up to 10% THD must not cause the power supply to go out of specified limits. The power supply shall operate properly at 85 VAC input voltage to guarantee proper design margins.

**Table 2: AC Input Rating**

PARAMETER	MIN	RATED	MAX	Max Input Current	Max Rated Input Current
Voltage (110)	90 V <sub>rms</sub>	100-127 V <sub>rms</sub>	140 V <sub>rms</sub>	8.4 A <sub>rms</sub> <sup>1,3</sup>	7.6 A <sub>rms</sub> <sup>4</sup>
Voltage (220)	180 V <sub>rms</sub>	200-240 V <sub>rms</sub>	264 V <sub>rms</sub>	4.2 A <sub>rms</sub> <sup>2,3</sup>	3.8 A <sub>rms</sub> <sup>4</sup>
Frequency	47 Hz		63 Hz		

- 1 Maximum input current at low input voltage range shall be measured at 90VAC. A 480 W output load shall be applied.
- 2 Maximum input current at high input voltage range shall be measured at 180 VAC. A 480 W output load shall be applied.
- 3 This is not intended to be used for determining agency input current markings.
- 4 Maximum rated input current is measured at 100 VAC and 200 VAC.

### 5.3 Efficiency

STATUS
<b>Required</b>

The power supply shall have a minimum efficiency of 65% at maximum load and over the specified AC voltage.

## 5.4 AC Line Dropout

STATUS
<b>Required</b>

An AC line dropout is defined to be when the AC input drops to 0 VAC at any phase of the AC line for any length of time. During an AC dropout of one cycle or less the power supply must meet dynamic voltage regulation requirements over the rated load. An AC line dropout of one cycle or less shall not cause any tripping of control signals or protection circuits. If the AC dropout lasts longer than one cycle, the power supply should recover and meet all turn on requirements. The power supply must meet the AC dropout requirement over rated AC voltages, frequencies, and output loading conditions. Any dropout of the AC line shall not cause damage to the power supply.

## 5.5 AC Line Fuse

STATUS
<b>Required</b>

The power supply shall incorporate one input fuse on the LINE side for input over-current protection to prevent damage to the power supply and meet product safety requirements. Fuses should be slow blow type or equivalent to prevent nuisance trips. AC inrush current shall not cause the AC line fuse to blow under any conditions. All protection circuits in the power supply shall not cause the AC fuse to blow unless a component in the power supply has failed. This includes DC output load short conditions.

## 5.6 AC Inrush

STATUS
<b>Required</b>

The power supply must meet inrush requirements for any rated AC voltage, during turn on at any phase of AC voltage, during a single cycle AC dropout condition, during repetitive ON/OFF cycling of AC, and over the specified temperature range ( $T_{op}$ ). The peak inrush current shall be less than the ratings of its critical components (including input fuse, bulk rectifiers, and surge limiting device).

STATUS
<b>Recommended</b>

An additional inrush current limit is recommended for some system applications that require multiple systems on a single AC circuit. AC line inrush current shall not exceed 40 A peak for one-quarter of the AC cycle, after which, the input current should be no more than the specified maximum input current from Table 2.

## 5.7 AC Line Transient Specification

STATUS
<b>Recommended</b>

AC line transient conditions shall be defined as “sag” and “surge” conditions. Sag conditions (also referred to as “brownout” conditions) will be defined as the AC line voltage dropping below nominal voltage. Surge conditions will be defined as the AC line voltage rising above nominal voltage.

The power supply shall meet the requirements under the following AC line sag and surge conditions.

**Table 3: AC Line Sag Transient Performance**

AC Line Sag				
Duration	Sag	Operating AC Voltage	Line Frequency	Performance Criteria
Continuous	10%	Nominal AC Voltage ranges	50/60 Hz	No loss of function or performance
0 to 1 AC cycle	100%	Nominal AC Voltage ranges	50/60 Hz	No loss of function or performance
>1 AC cycle	>10%	Nominal AC Voltage ranges	50/60 Hz	Loss of function acceptable, self recoverable

**Table 4: AC Line Surge Transient Performance**

AC Line Surge				
Duration	Surge	Operating AC Voltage	Line Frequency	Performance Criteria
Continuous	10%	Nominal AC Voltages	50/60 Hz	No loss of function or performance
0 to ½ AC cycle	30%	Mid-point of nominal AC Voltages	50/60 Hz	No loss of function or performance

## 5.8 AC Line Fast Transient Specification

STATUS
<b>Recommended</b>

The power supply shall meet the *EN61000-4-5* directive and any additional requirements in *IEC1000-4-5:1995* and the Level 3 requirements for surge-withstand capability, with the following conditions and exceptions:

- These input transients must not cause any out-of-regulation conditions, such as overshoot and undershoot, nor must it cause any nuisance trips of any of the power supply protection circuits.
- The surge-withstand test must not produce damage to the power supply.
- The supply must meet surge-withstand test conditions under maximum and minimum DC-output load conditions.

## 6 DC Output Specification

### 6.1 Output Connectors

The power supply shall have the following output connectors and wire harness configuration.

#### 6.1.1 Required Baseboard power connector

Connector housing: 24-Pin Molex 39-01-2240 or equivalent

Contact: Molex 44476-1111 or equivalent

**Table 5: P1 Baseboard Power Connector**

Pin	Signal	18 AWG Color	Pin	Signal	18 AWG Color
1	+3.3 VDC	Orange	13	+3.3 VDC	Orange
2	+3.3 VDC	Orange	14	-12 VDC	Blue
3	COM	Black	15	COM	Black
4	+5 VDC	Red	16	PS_ON	Green
5	COM	Black	17	COM	Black
6	+5 VDC	Red	18	COM	Black
7	COM	Black	19	COM	Black
8	PWR OK	Gray	20	Reserved (-5 V in ATX)	N.C.
9	5 VSB	Purple	21	+5 VDC	Red
10	+12 V2	Yellow/Blue Stripe	22	+5 VDC	Red
11	+12 V2	Yellow/Blue Stripe	23	+5 VDC	Red
12	+3.3 VDC	Orange	24	COM	Black

#### 6.1.2 Required Processor Power Connector

Connector housing: 8-Pin Molex 39-01-2080 or equivalent

Contact: Molex 44476-1111 or equivalent

**Table 6: Processor Power Connector**

Pin	Signal	18 AWG color	Pin	Signal	18 AWG Color
1	COM	Black	5	+12 V1	Yellow/Black Stripe
2	COM	Black	6	+12 V1	Yellow/Black Stripe
3	COM	Black	7	+12 V1	Yellow/Black Stripe
4	COM	Black	8	+12 V1	Yellow/Black Stripe

### 6.1.3 Required Peripheral Power Connectors

Connector housing: Amp 1-480424-0 or equivalent

Contact: Amp 61314-1 contact or equivalent

**Table 7: Peripheral Power Connectors**

Pin	Signal	18 AWG Color
1	+12V2	Yellow
2	COM	Black
3	COM	Black
4	+5 VDC	Red

### 6.1.4 Required Floppy Power Connector

Connector housing: Amp 171822-4 or equivalent

**Table 8: P9 Floppy Power Connector**

Pin	Signal	22 AWG Color
1	+5 VDC	Red
2	COM	Black
3	COM	Black
4	+12 V2	Yellow

### 6.1.5 Optional Server Signal Connector

Connector housing: 5-pin Molex 50-57-9405 or equivalent

Contacts: Molex 16-02-0088 or equivalent (gold plated)

Notes:

It is recommended to use gold plated signal contacts on both the power supply connector and the baseboard header.

If the optional server signal connector is not used on the power supply the 3.3VRS and ReturnS lines shall be crimped into the contacts in the baseboard power connector.

If the server signal connector is unplugged, the power supply shall not shutdown or go into an over voltage condition.

**Table 9: Server Signal Connector**

Pin	Signal	24 AWG Color
1	I2C Clock	White/Green Stripe
2	I2C Data	White/Yellow Stripe
3	Reserved	NA
4	ReturnS	Black/White Stripe
5	3.3RS	Orange/White Stripe

## 6.2 Grounding

STATUS
<b>Required</b>

The ground of the pins of the power supply wire harness provides the power return path. The wire harness ground pins shall be connected to safety ground (power supply enclosure).

## 6.3 Remote Sense

STATUS
<b>Optional</b>

The power supply may have remote sense for the +3.3V (3.3VS) and return (ReturnS) if the Optional Server Signal connector is implemented. The remote sense return (ReturnS) is used to regulate out ground drops for all output voltages; +3.3V, +5 V, +12V1, +12V2, +12V3, -12 V, and 5 VSB. The 3.3V remote sense (3.3VS) is used to regulate out drops in the system for the +3.3 V output. The remote sense input impedance to the power supply must be greater than 200 W on 3.3 VS and ReturnS. This is the value of the resistor connecting the remote sense to the output voltage internal to the power supply. Remote sense must be able to regulate out a minimum of 200 mV drop on the +3.3 V output. The remote sense return (ReturnS) must be able to regulate out a minimum of 200 mV drop in the power ground return. The current in any remote sense line shall be less than 5 mA to prevent voltage sensing errors. The power supply must operate within specification over the full range of voltage drops from the power supply's output connector to the remote sense points.

## 6.4 Output Power/Currents

STATUS
<b>Recommended</b>

The following table defines the power and current ratings for a 480 W power supply. The combined output power of all outputs shall not exceed the rated output power. Below are load ranges for each of the two power supply power levels. The power supply must meet both static and dynamic voltage regulation requirements for the minimum loading conditions.

**Table 10: 480 W Load Ratings**

Load Range 1			
Voltage	Minimum Continuous	Maximum Continuous	Peak
+3.3 V	0.5 A	24 A	
+5 V	5.0 A	20 A	
+12V1 (Processors)	2.0 A	16 A	18 A
+12V2 (Baseboard)	2.0 A	12 A	
+12V3 (Peripherals)	1.0 A	7 A	16 A
-12 V	0 A	0.5 A	
+5 VSB	0.1 A	2.0 A	

Load Range 2			
Voltage	Minimum Continuous	Maximum Continuous	Peak
+3.3 V	0.5 A	9 A	
+5 V	2.0 A	7 A	
+12V1 (Processors)	0.5 A	7 A	9 A
+12V2 (Baseboard)	0 A	2 A	
+12V3 (Peripherals)	0.5 A	7 A	14 A
-12 V	0 A	0.5 A	
+5 VSB	0.1 A	2.0 A	

- 1 Maximum continuous total DC output power should not exceed 480 W.
- 2 Maximum continuous combined load on +3.3 VDC and +5 VDC outputs shall not exceed 115 W.
- 3 Maximum Peak total DC output power should not exceed 550 W.
- 4 Peak power and current loading shall be supported for a minimum of 1 second.
- 5 Maximum combined current for the 12 V outputs shall be 32 A.
- 6 Maximum 12V combined peak current shall be 44A.

### 6.4.1 Standby Outputs

STATUS
<b>Required</b>

The 5 VSB output shall be present when an AC input greater than the power supply turn on voltage is applied.

## 6.5 Voltage Regulation

STATUS
<b>Required</b>

The power supply output voltages must stay within the following voltage limits when operating at steady state and dynamic loading conditions. These limits include the peak-peak ripple/noise specified in Section 5.8. All outputs are measured with reference to the return remote sense (ReturnS) signal. The 5 V, 12V1, 12V2, 12V3, -12 V and 5 VSB outputs are measured at the power supply connectors referenced to ReturnS. The +3.3 V is measured at its remote sense signal (3.3VS) located at the signal connector.

**Table 11: Voltage Regulation Limits**

Parameter	MIN	NOM	MAX	Units	Tolerance
+3.3 V	+3.20	+3.30	+3.46	V <sub>rms</sub>	+5/-3%
+5 V	+4.80	+5.00	+5.25	V <sub>rms</sub>	+5/-4%
+12V1	+11.52	+12.00	+12.60	V <sub>rms</sub>	+5/-4%
+12V2	+11.52	+12.00	+12.60	V <sub>rms</sub>	+5/-4%
+12V3	+11.52	+12.00	+12.60	V <sub>rms</sub>	+5/-4%
-12 V	-11.40	-12.20	-13.08	V <sub>rms</sub>	+9/-5%
+5 VSB	+4.85	+5.00	+5.25	V <sub>rms</sub>	+5/-3%

STATUS
<b>Optional</b>

Some system applications may require tighter regulation limits on the +5 V output. The optional regulation limits are shown below.

**Table 12: Optional +5V Regulation Limits**

Parameter	MIN	NOM	MAX	Units	Tolerance
+5 V	+5.85	+5.00	+5.25	V <sub>rms</sub>	+5/-3%

## 6.6 Dynamic Loading

STATUS
<b>Required</b>

The output voltages shall remain within the limits specified in Table 11 for the step loading and within the limits specified in Table 13 for the capacitive loading. The load transient repetition rate shall be tested between 50 Hz and 5 kHz at duty cycles ranging from 10%-90%. The load transient repetition rate is only a test specification. The  $\Delta$  step load may occur anywhere within the MIN load to the MAX load shown in Table 10.

**Table 13: Transient Load Requirements**

Output	D Step Load Size	Load Slew Rate	Capacitive Load
+3.3 V	30% of max load	0.5 A/ $\mu$ s	1,000 $\mu$ F
+5 V	30% of max load	0.5 A/ $\mu$ s	1,000 $\mu$ F
12V1+12V2+12V3	65% of max load	0.5 A/ $\mu$ s	1,000 $\mu$ F
+5 VSB	25% of max load	0.5 A/ $\mu$ s	1 $\mu$ F

## 6.7 Capacitive Loading

STATUS
<b>Required</b>

The power supply shall be stable and meet all requirements with the following capacitive loading ranges.

Note: Up to 10,000  $\mu\text{F}$  of the +12V capacitive loading may be on the +12V1 output.

**Table 14: Capacitive Loading Conditions**

Output	MIN	MAX	Units
+3.3 V	10	12,000	$\mu\text{F}$
+5 V	10	12,000	$\mu\text{F}$
+12 V	10	11,000	$\mu\text{F}$
-12 V	1	350	$\mu\text{F}$
+5 VSB	1	350	$\mu\text{F}$

## 6.8 Ripple / Noise

STATUS
<b>Required</b>

The maximum allowed ripple/noise output of the power supply is defined in Table 15. This is measured over a bandwidth of 0 Hz to 20 MHz at the power supply output connectors. A 10  $\mu\text{F}$  tantalum capacitor in parallel with a 0.1  $\mu\text{F}$  ceramic capacitor are placed at the point of measurement.

**Table 15: Ripple and Noise**

+3.3 V	+5 V	+12 V	-12 V	+5 VSB
50 mVp-p	50 mVp-p	120 mVp-p	120 mVp-p	50 mVp-p


## 6.9 Timing Requirements

STATUS
<b>Required</b>

These are the timing requirements for the power supply operation. The output voltages must rise from 10% to within regulation limits ( $T_{vout\_rise}$ ) within 5 to 70 ms. The +3.3 V, +5 V and +12 V output voltages should start to rise at about the same time. All outputs must rise monotonically. The +5 V output needs to be greater than the +3.3 V output during any point of the voltage rise. The +5V output must never be greater than the +3.3V output by more than 2.25 V. Each output voltage shall reach regulation within 50 ms ( $T_{vout\_on}$ ) of each other during turn on of the power supply. Each output voltage shall fall out of regulation within 400 ms ( $T_{vout\_off}$ ) of each other during turn off. Figure 3 and Figure 4 show the turn ON and turn OFF timing requirements. In Figure 4, the timing is shown with both AC and PSON# controlling the ON/OFF of the power supply.

**Table 16: Output Voltage Timing**

Item	Description	MIN	MAX	Units
$T_{vout\_rise}$	Output voltage rise time from each main output.	5	70	ms
$T_{vout\_on}$	All main outputs must be within regulation of each other within this time.		50	ms
$T_{vout\_off}$	All main outputs must leave regulation within this time.		400	ms

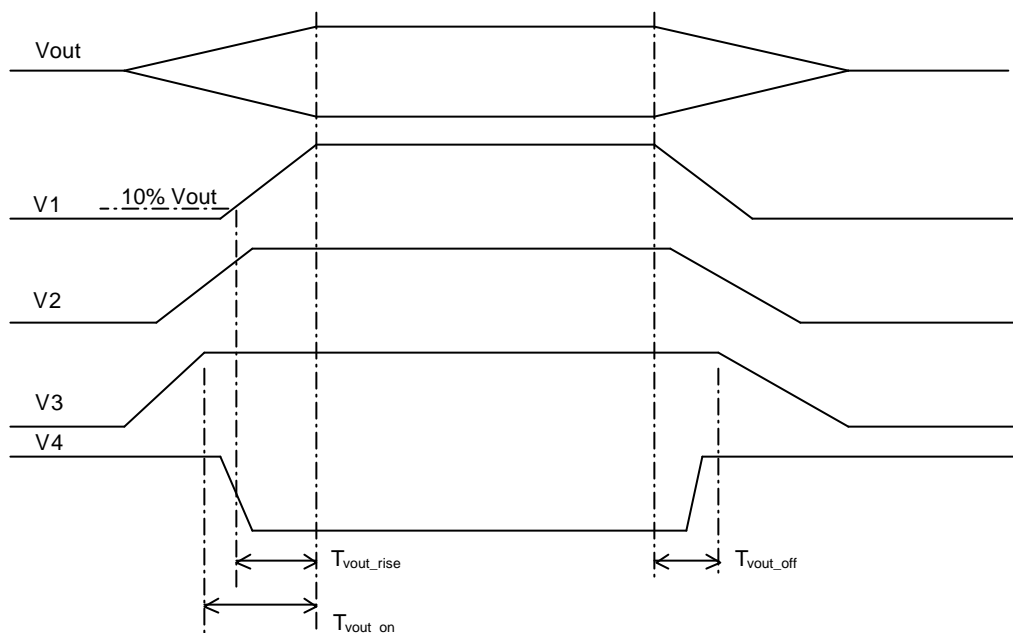


**Figure 3: Output Voltage Timing**

**Table 17: Turn On/Off Timing**

Item	Description	MIN	MAX	UNITS
T <sub>sb_on_delay</sub>	Delay from AC being applied to 5 VSB being within regulation.		1500	ms
T <sub>ac_on_delay</sub>	Delay from AC being applied to all output voltages being within regulation.		2500	ms
T <sub>vout_holdup</sub>	Time all output voltages stay within regulation after loss of AC.	18		ms
T <sub>pwok_holdup</sub>	Delay from loss of AC to deassertion of PWOK.	17		ms
T <sub>pson_on_delay</sub>	Delay from PSON# active to output voltages within regulation limits.	5	400	ms
T <sub>pson_pwok</sub>	Delay from PSON# deactive to PWOK being deasserted.		50	ms
T <sub>pwok_on</sub>	Delay from output voltages within regulation limits to PWOK asserted at turn on.	200	1000	ms
T <sub>pwok_off</sub>	Delay from PWOK deasserted to output voltages (3.3 V, 5 V, 12 V, -12 V) dropping out of regulation limits.	1		ms
T <sub>pwok_low</sub>	Duration of PWOK being in the deasserted state during an off/on cycle using AC or the PSON# signal.	100		ms
T <sub>sb_vout</sub>	Delay from 5 VSB being in regulation to O/Ps being in regulation at AC turn on.	50	1000	ms

STATUS
<b>Recommended</b>

Item	Description	MIN	MAX	UNITS
T <sub>vout_holdup</sub>	Time all output voltages stay within regulation after loss of AC.	21		ms
T <sub>pwok_holdup</sub>	Delay from loss of AC to deassertion of PWOK.	20		ms
T <sub>sb_holdup</sub>	Time 5VSB output voltage stays within regulation after loss of AC.	70		ms

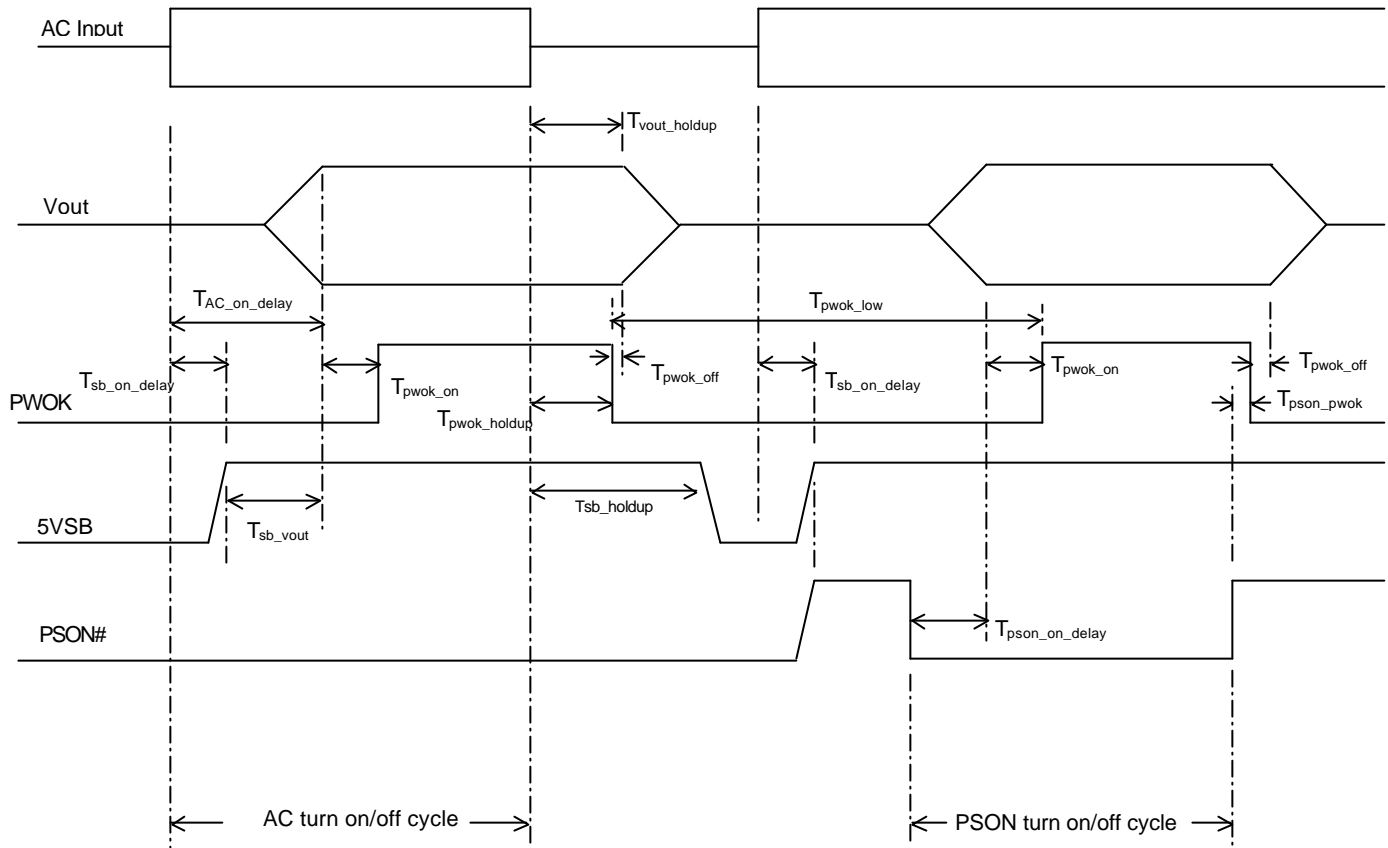

**Figure 4: Turn On/Off Timing (Single Power Supply)**

## 7 Protection Circuits

STATUS
<b>Required</b>

Protection circuits inside the power supply shall cause only the power supply's main outputs to shutdown. If the power supply latches off due to a protection circuit tripping, an AC cycle OFF for 15 s and a PSON<sup>#</sup> cycle HIGH for 1 s must be able to reset the power supply.

### 7.1 Current Limit

STATUS
<b>Required</b>

The power supply shall have current limit to prevent the +3.3 V, +5 V, and +12 V outputs from exceeding the values shown in Table 18. If the current limits are exceeded, the power supply shall shutdown and latch off. The latch will be cleared by toggling the PSON<sup>#</sup> signal or by an AC power interruption. The power supply shall not be damaged from repeated power cycling in this condition. -12 V and 5 VSB shall be protected under over current or shorted conditions so that no damage can occur to the power supply.

**Table 18: Over Current Protection**

Voltage	Over Current Limit (I <sub>out</sub> limit)
+3.3 V	110% minimum; 150% maximum
+5 V	110% minimum; 150% maximum
+12V	110% minimum; 150% maximum

### 7.2 240VA Protection

STATUS
<b>Recommended</b>

System designs may require user access to energized areas of the system. In these cases the power supply may be required to meet regulatory 240VA limits for any power rail. Since the +12V rail combined power exceeds 240VA it must be divided into separate channels to meet this requirement. Each separate rail needs to be limited to less than 20A for each +12V rail. The separate +12V rails do not necessarily need to be independently regulated outputs. They can share a common power conversion stage. The +12V rail is divided into two rails for the 450W power level and three rails for the 550W power level. +12V1 is dedicated for providing power to the input of the processor voltage regulator(s). The +12V2 rail is used to power the rest of the main board +12V power needs and peripherals devices. The +12V3 on the 550W power supply is used to power peripheral devices only.

**Table 19: Over Current Protection**

Voltage	Over Current Limit (Iout limit)
+3.3 V	110% minimum; 150% maximum
+5 V	110% minimum; 150% maximum
+12V1	18A minimum; 20A maximum
+12V2	12A minimum; 20A maximum
+12V3	16A minimum; 20A maximum

### 7.3 Over Voltage Protection

STATUS
<b>Required</b>

The power supply over voltage protection shall be locally sensed. The power supply shall shutdown and latch off after an over voltage condition occurs. This latch shall be cleared by toggling the PSON<sup>#</sup> signal or by an AC power interruption. Table 20 contains the over voltage limits. The values are measured at the output of the power supply's connectors. The voltage shall never exceed the maximum levels when measured at the power pins of the power supply connector during any single point of fail. The voltage shall never trip any lower than the minimum levels when measured at the power pins of the power supply connector.

**Table 20: Over Voltage Limits**

Output Voltage	MIN (V)	MAX (V)
+3.3 V	3.9	4.5
+5 V	5.7	6.5
+12V1,+12V2, +12V3	13.3	14.5
-12 V	-13.3	-14.5
+5 VSB	5.7	6.5

### 7.4 Over Temperature Protection

STATUS
<b>Recommended</b>

The power supply will be protected against over temperature conditions caused by loss of fan cooling or excessive ambient temperature. In an OTP condition the PSU will shutdown. When the power supply temperature drops to within specified limits, the power supply shall restore power automatically. The OTP circuit must have built in hysteresis such that the power supply will not oscillate on and off due to temperature recovering condition. The OTP trip level shall have a minimum of 4 °C of ambient temperature hysteresis.

## 8 Control and Indicator Functions

The following sections define the input and output signals from the power supply.

Signals that can be defined as low true use the following convention:

$signal^\# = \text{low true}$


### 8.1 PSON#

STATUS
<b>Required</b>

The PSON# signal is required to remotely turn on/off the power supply. PSON# is an active low signal that turns on the +3.3 V, +5 V, +12 V, and -12 V power rails. When this signal is not pulled low by the system, or left open, the outputs (except the +5 VSB and Vbias) turn off. This signal is pulled to a standby voltage by a pull-up resistor internal to the power supply. Refer to [Figure 4](#) for timing diagram.

**Table 21: PSON# Signal Characteristic**

<b>Signal Type</b>	Accepts an open collector/drain input from the system. Pull-up to VSB located in power supply.	
<b>PSON# = Low</b>	ON	
<b>PSON# = Open or High</b>	OFF	
	<b>MIN</b>	<b>MAX</b>
<b>Logic level low (power supply ON)</b>	0 V	1.0 V
<b>Logic level high (power supply OFF)</b>	2.0 V	5.25 V
<b>Source current, Vpson = low</b>		4 mA
<b>Power up delay: <math>T_{pson\_on\_delay}</math></b>	5 ms	400 ms
<b>PWOK delay: <math>T_{pson\_pwok}</math></b>		50 ms

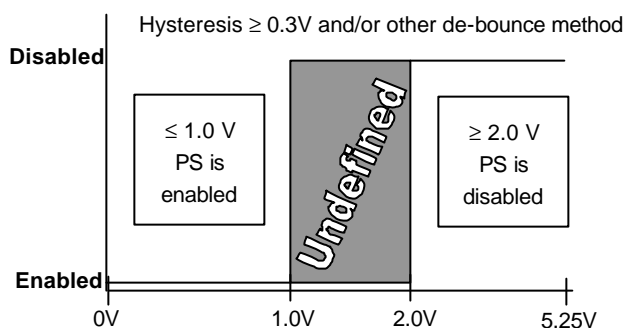

**Figure 5: PSON# Signal Characteristics**

## 8.2 PWOK (Power OK)

STATUS
<b>Required</b>

PWOK is a power OK signal and will be pulled HIGH by the power supply to indicate that all the outputs are within the regulation limits of the power supply. When any output voltage falls below regulation limits or when AC power has been removed for a time sufficiently long so that power supply operation is no longer guaranteed, PWOK will be deasserted to a LOW state. See [Figure 4](#) for a representation of the timing characteristics of PWOK. The start of the PWOK delay time shall be inhibited as long as any power supply output is in current limit.

**Table 22: PWOK Signal Characteristics**

<b>Signal Type</b>	Open collector/drain output from power supply. Pull-up to VSB located in power supply.	
<b>PWOK = High</b>	Power OK	
<b>PWOK = Low</b>	Power Not OK	
	<b>MIN</b>	<b>MAX</b>
<b>Logic level low voltage, Isink = 4 mA</b>	0 V	0.4 V
<b>Logic level high voltage, Isource=200 mA</b>	2.4 V	5.25 V
<b>Sink current, PWOK = low</b>		4 mA
<b>Source current, PWOK = high</b>		2 mA
<b>PWOK delay: <math>T_{pwok\_on}</math></b>	200 ms	1000 ms
<b>PWOK rise and fall time</b>		100 $\mu$ s
<b>Power down delay: <math>T_{pwok\_off}</math></b>	1 ms	200 ms

## 8.3 Field Replacement Unit (FRU) Signals

STATUS
<b>Optional</b>

Two pins will be allocated for the FRU information on the power supply connector. One pin is the Serial Clock (SCL). The second pin is used for Serial Data (SDA). Both pins are bi-directional and are used to form a serial bus. The FRU circuits inside the power supply must be powered off of 5 VSB output and grounded to ReturnS (remote sense return). The Write Control (or Write protect) pin should be tied to ReturnS inside the power supply so that information can be written to the EEPROM.

### 8.3.1 FRU Data

FRU data shall be stored starting in address location 8000h through 80FFh. The FRU data format shall be compliant with the IPMI specifications. The current version of these specifications are available at: <http://developer.intel.com/design/servers/ipmi/spec.htm>.

### 8.3.2 FRU Data Format

The information to be contained in the FRU device is shown in the following table.

**Table 23: FRU Device Information**

Area Type	Description
Common Header	As defined by the FRU document
Internal Use Area	Not required, do not reserve
Chassis Info Area	Not applicable, do not reserve
Board Info Area	Not applicable, do not reserve

#### 8.3.2.1 Product Info Area

As defined by the IPMI FRU document. Product information shall be defined as follows:

**Table 24: FRU Device Product Information Area**

Field Name	Field Description
Manufacturer Name	{Formal name of manufacturer}
Product Name	{Manufacturer's model number}
Product part/model number	Customer part number
Product Version	Customer current revision
Product Serial Number	{Defined at time of manufacture}
Asset Tag	{Not used, code is zero length byte}
FRU File ID	{Not required}
PAD Bytes	{Added as necessary to allow for 8-byte offset to next area}

### 8.3.2.2 MultiRecord Area

As defined by the IPMI FRU document. The following record types shall be used on this power supply:

- Power Supply Information (Record Type 0x00)
- DC Output (Record Type 0x01)
- No other record types are required for the power supply.

MultiRecord information shall be defined as follows:

**Table 25: FRU Device Product Information Area**

Field Name (PS Info)	Field Information Definition
Overall Capacity (watts)	480
Peak VA	550
Inrush current (A)	50
Inrush interval (ms)	5
Low end input voltage range 1	90
High end input voltage range 1	140
Low end input voltage range 2	180
High end input voltage range 2	264
A/C dropout tol. (ms)	20
Binary flags	Set for: Hot Swap support, Autoswitch, and PFC
Peak Wattage	Set for: 10 s, 550 W
Combined wattage	Set for 5 V & 3.3V combined wattage of 115 W
Predictive fail tach support	Not supported, 00h value
Field Name (Output)	Field Description: Five outputs are to be defined from #1 to #5, as follows: +3.3 V, +5 V, +12 V, -12V, and +5 VSB.
Output Information	Set for: Standby on +5 VSB, No Standby on all others.
All other output fields	Format per IPMI specification, using parameters in the EPS12V specification.

## 9 MTBF

STATUS
<b>Recommended</b>

The power supply shall have a minimum MTBF at continuous operation of 1) 50,000 hours at 100% load and 45 °C, as calculated by Bellcore RPP, or 2) 100,000 hours demonstrated at 100% load and 50 °C.

## 10 Agency Requirements

STATUS
<b>Recommended</b>

The power supply must comply with all regulatory requirements for its intended geographical market. Depending on the chosen market, regulatory requirements may vary. Although a power supply can be designed for worldwide compliance, there may be cost factors that drive different versions of supplies for different geographically targeted markets.

This specification requires that the power supply meet all regulatory requirements for the intended market at the time of manufacturing. Typically this includes:

- UL
- CSA
- A Nordic CENELEC
- TUV
- VDE
- CISPR Class B
- FCC Class B

The power supply, when installed in the system, shall meet immunity requirements specified in EN55024. Specific tests are to be EN61000-4-2, -3, -4, -5, -6, -8, -11, EN61000-3-2, -3, and JEIDI MITI standard. The power supply must maintain normal performance within specified limits. This testing must be completed by the system EMI engineer. Conformance must be designated with the European Union CE Marking. Specific immunity level requirements are left to customer requirements.