



Run Cool
 Run Reliably
 Run With 80 PLUS
www.80PLUS.org

ENP-5150GH

Application Reference

- Performance PC/Workstation



- 4U Rack-Mount IPC



Electrical Specifications

- Input Voltage 100 ~ 240 VAC Auto-Sensing
- Frequency 47 ~ 63 Hz
- Input current 10 Arms @ 115 VAC
5 Arms @ 230 VAC
- Hold-up Time 17ms in regulation ranges

Environmental Specifications

- Protection OCP/OPP/OVP
OTP/SCP
- Operating/Storage Temp. 5~50°C/-40~70°C
- Operating/Storage Humidity 20~85%/5~95%
- Operating/Storage Altitude 3,000/15,000 FT
- MTBF 100,000 HRS
- Safety Approvals cUL, CB, TUV
- EMC Regulations FCC, CE

Output Specifications

Voltage	Regulation Load	Minimum Load	Maximum Load	Peak
+3.3V	+/-5%	0A	25.0A	--
+5.0V	+/- 5%	0A	20.0A	--
+12.0V1	+/- 5%	1.0A	18.0A	19.0A
+12.0V2	+/- 5%	1.0A	18.0A	19.0A
-12.0V	+/- 10%	0A	0.5A	--
+5 Vsb	+/- 5%	0A	3.0A	3.5A

(*) Total maximum combines load output on +3.3V and +5V rail shall not exceed 150 Watts

ATX12V




Run Cool
 Run Reliably
 Run With 80 PLUS
www.80PLUS.org



Mechanical Drawing

ATX12V

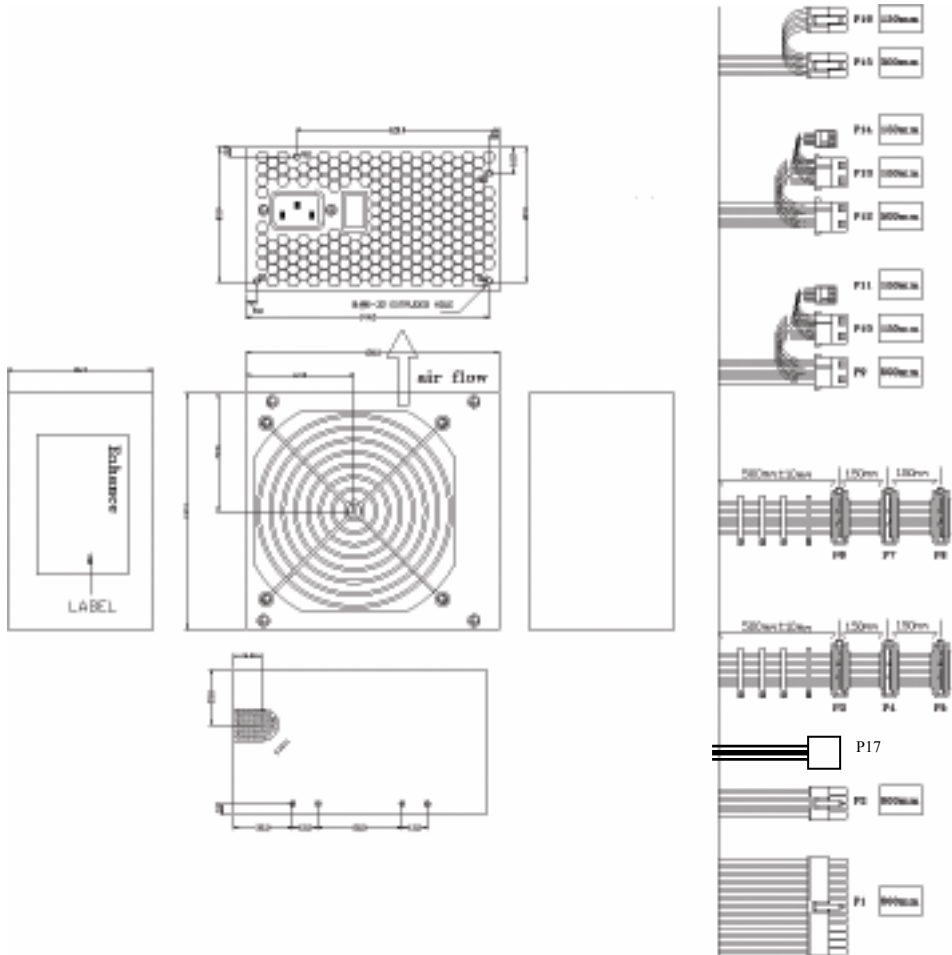




Run Cool
 Run Reliably
 Run With 80 PLUS
www.80PLUS.org



Wire Harness

Description

P1 - Main Power



P2 - 8 Pin CPU-VR Power Connector



P17 - 4 Pin Processor Power



P15, 16 - Power Connector for high wattage PCI-Exp VGA



P9, 10, 12, 13 - Peripheral



P11, 14 - Floppy



P3, 4, 5 - SATA-1
 P6, 7, 8 - SATA-2



Connector Housing

Molex 39-01-2240 or Equivalent

1	Orange	+3.3V	13	Orange	+3.3V
2	Orange	+3.3V	14	Blue	-12VDC
3	Black	GND	15	Black	GND
4	Red	+5V	16	Green	PS_ON
5	Black	GND	17	Black	GND
6	Red	+5V	18	Black	GND
7	Black	GND	19	Black	GND
8	Gray	PWR OK	20	N/E	Reserved
9	Purple	5 VSB	21	Red	+5V
10	Yellow	+12V1	22	Red	+5V
11	Yellow	+12V1	23	Red	+5V
12	Orange	+3.3V	24	Black	GND

Molex 39-01-2080 or Equivalent

1	Black	GND	5	Yellow	+12V1	
2	Black	GND	6	Yellow	+12V1	
3	Black	GND	7	Yellow	Black	+12V2
4	Black	GND	8	Yellow	Black	+12V2

Molex 39-01-2040 or Equivalent

1	Black	GND	3	Yellow	Black	+12V2
2	Black	GND	4	Yellow	Black	+12V2

Molex 45559-0002 or Equivalent

1	Yellow	+12V1	4	Black	GND
2	Yellow	+12V1	5	Black	GND
3	Yellow	+12V1	6	Black	GND

Molex 8981-04P of Equivalent

1	Yellow	+12V1
2	Black	GND
3	Black	GND
4	Red	+5V

AMP 171822-4 or Equivalent

1	Red	+5V
2	Black	GND
3	Black	GND
4	Yellow	+12V1

Molex 88751 or Equivalent

SATA-1

1	Yellow	+12V1
2	Black	GND
3	Red	+5V
4	Black	GND
5	Orange	+3.3V

SATA-2

1	Yellow	Black	+12V2
2	Black		GND
3	Red		+5V
4	Black		GND
5	Orange		+3.3V

Dimension (WxLxH)

- 150 x 140 x 86 (mm)
- 5.9 x 5.5 x 3.38 (inch)

Cooling Fan

- 12V DC, 120mm

Notes

- Pictures, drawing and specification subject to change without notice. All new processors support will be updated once official announced by vendors
- All company logo and legal name belong to original company. All copyright reserved by Enhance Electronics.
- One-Year Standard Warranty
- Last Update: 11/13/2008

ATX12V