

# ENA-080612

• 60W



## Features

- Full Range AC Input
- Short Circuit Protection
- Over Voltage Protection
- Over Load Protection

## Electrical Specifications

- Input Voltage 100 ~ 240 VAC  
Full Voltage Range
- Frequency 47 ~ 63 Hz
- Input current 1.5A Max.
- Holdup Time 10 ms @ Full Load
- High Efficiency 70% Min

## Environmental Specifications

- Operating/Storage Temp. 0~40°C/-20~60°C
- Relative Humidity 5 ~ 95%
- Operating/Storage Altitude 10,000/50,000 FT
- MTBF 70,000 HRS

## Output Specifications

Voltage	Regulation	Min.	Max.	Maximum Peak to Peak Ripple & Noise
+12V	+/- 5%	11.4V 0.0A	12.6V 5.0A	120 mVp-p

## Dimension (WxLxH)

- 123 x 63 x 38 (mm)
- 4.8 x 2.5 x 1.5 (inch)

## Notes


- Specification subject to change without notice. All new processors support will be updated once official announced by vendors
- All company logo and legal name belong to original company. All copyright reserved by Enhance Electronics.
- One-Year Standard Warranty
- Last Update: 8/17/2005

# ENA-080612

• 60W

## Mechanical Drawing

# Adaptor

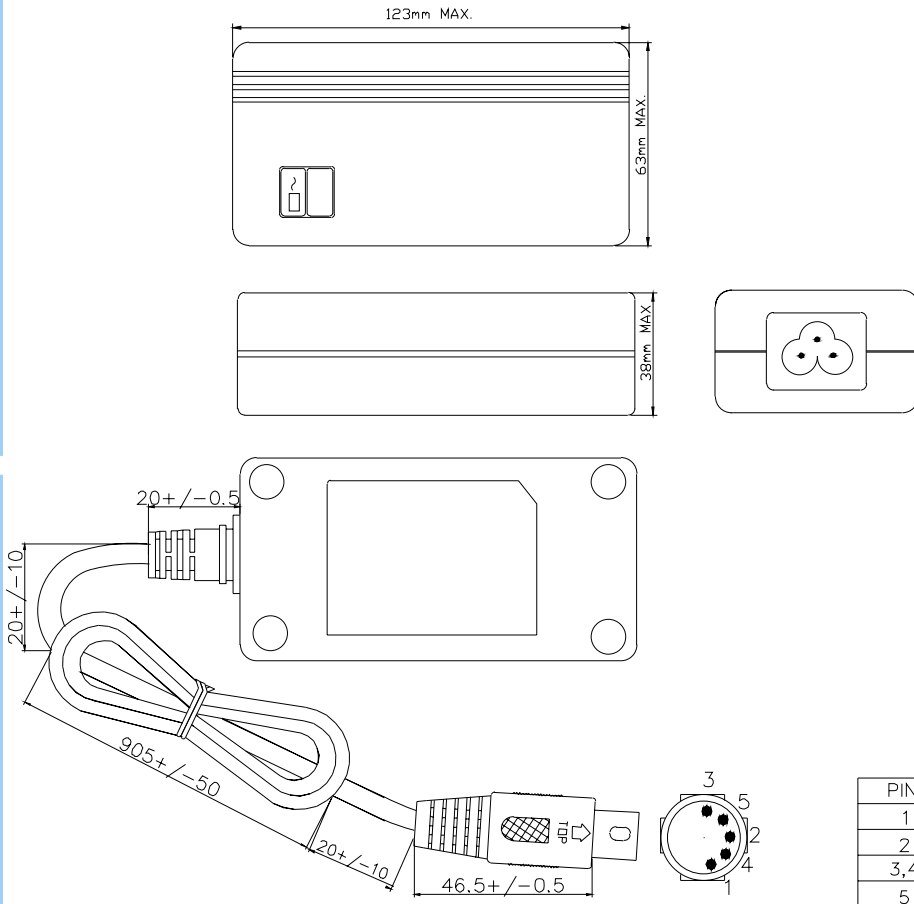

PIN	PCB CONDITION
1	Ground
2	Ground
3,4	+12V
5	+12V