

- Power The World with Highest Efficiency



ATX-0260GA

Features

- **600W Output, Active PFC**
- **Protections:** OVP, OPP, SCP, OTP
- **Reliability:** MTBF 100,000 hrs @ 25°C, Full Load
- **Efficiency:** 80% @ 115Vac, Full Load
- **Safety Approval:** cUL, NEMKO, CB, CCC, BSMI
- **Warranty:** 1-year manufacturer



Input Specification

Parameter	Conditions/Description	Min.	Normal	Max.	Units
Input Voltage Range	Universal Input	103	115-240	264	V(ac)
Input Frequency Range		47	60/50	63	Hz
Input Current	Measured at 90 Vac / 264 Vac input, full load output		10/5		A
Inrush Current	Measured at 50A@115Vrms / 100A@ 230Vac (25°C ambient temperature, cold start).				A
Efficiency	Measured at 115 Vac or 230Vac, Full Load		80		%

Output Specification

Parameter	Conditions/Description	Voltage Regulation		Ripple Noise (mVp-p)	Output Current (Amps)				Units
		Range	Min. (V)	Max. (V)	Min.	Normal	Max.	Peak	
+3.3VDC		+/-5%	3.14	3.47	50	0.1	-	24	-
+5VDC		+/-5%	4.75	5.25	50	0.2	-	24	-
+12V1DC		+/-5%	11.4	12.6	120	0.1	-	25	-
+12V2DC		+/-5%	11.4	12.6	120	0.5	-	25	-
-12VDC		+/-10%	-10.8	-13.2	120	0	-	0.3	-
+5VSB		+/-5%	4.75	5.25	50	0	-	2.5	3.5
Voltage Hold-Up Time	Measured at 115Vac/60Hz or 230Vac/50Hz/100% load after power source removed.				17				mSec
Output Rise Time							10		mSec
Total Combined Output of +3.3V and +5V can not exceed 140W .									
Total Combined Output of +12V1 & +12V2 can not exceed 576W .									

Environmental Specification

Parameter	Conditions/Description	Min.	Normal	Max.	Units
MTBF	Calculated via MIL-HDBK-217F @ 25°C ambient temperature, Full load, 110 Vac	100,000			Hours
Operating Temperature	Full load	0		40	°C
Storage Temperature		-40		70	°C
Relative Humidity	Non-Condensing	20		85	%
Dimension	Length x Width x Height	150 x 140 x 86/5.9 x 5.5 x 3.38			mm / inch
Cooling Fan	12VDC	120			mm
ROHS	European Directive 2002/95/EC				

Reliability Protection

Parameter	Conditions/Description	Recovery Mode
Overload	Transit to current limit mode if output over 110% - 160%	Shut Down Output, Auto recover once reset AC power-on by user
Over Voltage		Shut Down Output, Auto recover once reset AC power-on by user
Short Circuit		Shut Down Output, Auto Recover once faults conditions removed
Over Temperature		Shut Down Output, Auto Recover once faults conditions removed

Safety & EMC Compliance

Category	Standard	Comment
SAFETY	cUL, NEMKO, CB, CCC, BSMI	Approved
EMI Conduction & Radiation		Compliance
Harmonic Current Emissions	EN61000-3-2	Compliance
EMS Immunity	Voltage Fluctuation	EN61000-3-3
	Electrostatic Discharge (ESD)	EN61000-4-2
	Radiated Susceptibility	EN61000-4-3
	Fast Transients / Burst - EFT	EN61000-4-4
	Input Line Surge Immunity	EN61000-4-5
	Conducted Susceptibility	EN61000-4-6
	Power Frequency Magnetic Field	EN61000-4-8
	Voltage Dips	EN61000-4-11

ATX12V




Desktop PC



Media Server

- Power The World with Highest Efficiency

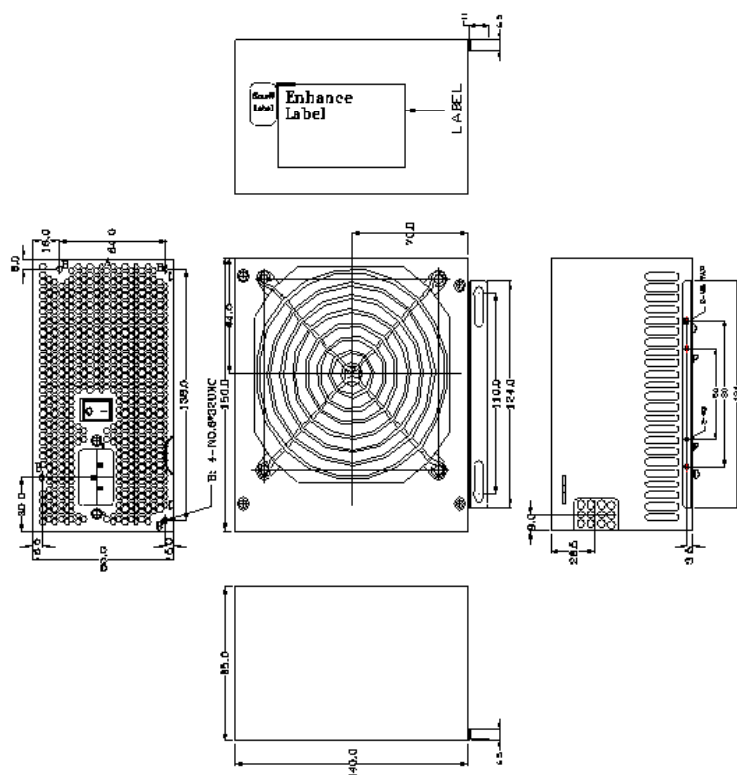

P1	Molex 39-01-2240 or equivalent
P2 CPU-VR Power	Molex 39-01-2080 or equivalent
P3 CPU-VR Power	Molex 39-01-2040 or equivalent
P4,P5 PCI-Exp VGA	Molex 45559-0002 or equivalent
P6, P7, P9, P10	Molex 8981-04P or equivalent
P8, P11	AMP 171822-4 or equivalent
P12, P13, P14 – SATA-1	Molex 88751 or equivalent
P15, P16, P17 – SATA-2	Molex 88751 or equivalent

Notes

1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheet are no longer controlled by Enhance Electronics, refer to <http://www.enhanceusa.com> for the most current product specifications.
2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured.
3. Mechanical drawings (model No. ATX-0260GA) is for reference only. The cable wire configuration may vary from other custom designed models as picture showing. Please contact your sales representative for detail.
4. Specifications are for reference only. All specifications are measured at an ambient temperature of 25°C, humidity 65%, 230Vac nominal input voltage and at rated output load unless otherwise specified.

