

- Power The World with Highest Efficiency

ENO-1612

Features

- **120W Output, Active PFC**
- **Protections:** OVP, OPP, SCP, OTP
- **Reliability:** MTBF 100,000 hrs @ 25°C, Full Load
- **High Efficiency:** 80% @ 115Vac, Full Load
- **Safety Approval:** Pending
- **Warranty:** 1-year manufacturer



| Input Specification | | | | | |
|-----------------------|---|------|---------|------|-------|
| Parameter | Conditions/Description | Min. | Normal | Max. | Units |
| Input Voltage Range | Universal Input | 90 | 115-230 | 264 | V(ac) |
| Input Frequency Range | | 47 | 60/50 | 63 | Hz |
| Input Current | Measured at 115 Vac input, full load output | | | 2.0 | A |
| Inrush Current | Measured at 50A@115Vrms /100A@ 230Vac (25°C ambient temperature, cold start). | | | | A |
| Efficiency | Measured at 115 Vac or 230Vac, Full Load | | 80 | | % |

| Output Specification | | | | | | | | | | |
|--|---|--------------------|----------|----------|--------------|-----------------------|--------|------|------|-------|
| Parameter | Conditions/Description | Voltage Regulation | | | Ripple Noise | Output Current (Amps) | | | | Units |
| | | Range | Min. (V) | Max. (V) | (mVp-p) | Min. | Normal | Max. | Peak | |
| +3.3VDC | | +/-5% | 3.1 | 3.5 | 50 | 0 | - | 7 | - | |
| +5VDC | | +/-3% | 4.85 | 5.25 | 50 | 1 | - | 8 | - | |
| +5VSB | | +/-5% | 4.85 | 5.25 | 50 | 0 | - | 1.0 | 3.5 | |
| +12V1DC | | +/-5% | 11.4 | 12.75 | 120 | 0 | - | 10.0 | 19 | |
| -12VDC | | +/-10% | -11.25 | -13.0 | 200 | 0 | - | 0.5 | - | |
| Hold-Up Time | Measured at 115Vac/60Hz or 230Vac/50Hz/90% load after power source removed. | | | | | 16 | | | | mSec |
| Output Rise Time | | | | | | | | 10 | | mSec |
| Total Combined Output of +3.3V and +5V can not exceed 50W. | | | | | | | | | | |

| Environmental Specification | | | | | |
|-----------------------------|---|---------------------------------|--------|-------|-----------|
| Parameter | Conditions/Description | Min. | Normal | Max. | Units |
| MTBF | Calculated via MIL-HDBK-217F @ 25°C ambient temperature, Full load, 115 Vac | 100,000 | | | Hours |
| Operating Temperature | Full load with min 38CFM forced air | 0 | | 50 | °C |
| Storage Temperature | | -40 | | 70 | °C |
| Relative Humidity | Operating/Storage Non-Condensing | 10/10 | | 70/95 | % |
| Dimension | Length x Width x Height | 152.4 x 83.8 x 38/6 x 3.3 x 1.5 | | | mm / inch |
| ROHS | European Directive 2002/95/EC | | | | |




| Reliability Protection | | |
|------------------------|--|---|
| Parameter | Conditions/Description | Recovery Mode |
| Overload | Transit to current limit mode if output over 110% - 160% | Shut Down Output, Auto recover once reset AC power-on by user |
| Over Voltage | | Shut Down Output, Auto recover once reset AC power-on by user |
| Short Circuit | | Shut Down Output, Auto Recover once faults conditions removed |
| Over Temperature | | Shut Down Output, Auto Recover once faults conditions removed |

| Safety & EMC Compliance | | |
|----------------------------|--------------------------------|---------------------------|
| Category | Standard | Comment |
| SAFETY | cUL, TUV | Meet |
| EMI Conduction & Radiation | | Compliance |
| Harmonic Current Emissions | | EN61000-3-2 Compliance |
| EMS Immunity | Voltage Fluctuation | EN61000-3-3 Compliance |
| | Electrostatic Discharge (ESD) | EN61000-4-2 Compliance |
| | Radiated Susceptibility | EN61000-4-3 Compliance |
| | Fast Transients / Burst - EFT | EN61000-4-4 Compliance |
| | Input Line Surge Immunity | EN61000-4-5 Compliance |
| | Conducted Susceptibility | EN61000-4-6 Compliance |
| | Power Frequency Magnetic Field | EN61000-4-8 Compliance |
| Voltage Dips | EN61000-4-11 Compliance | |



Industrial Panel PC

- Power The World with Highest Efficiency

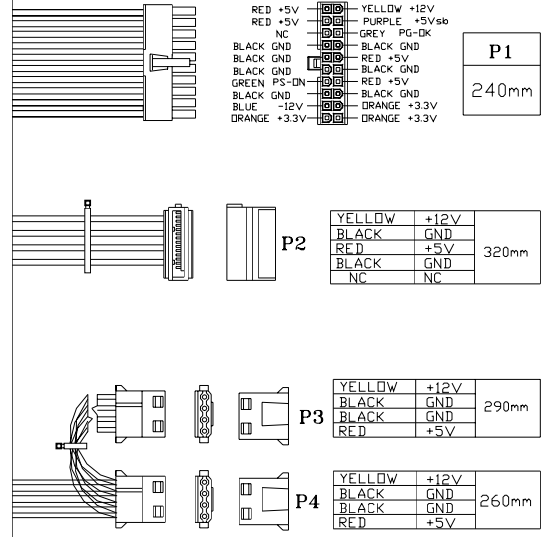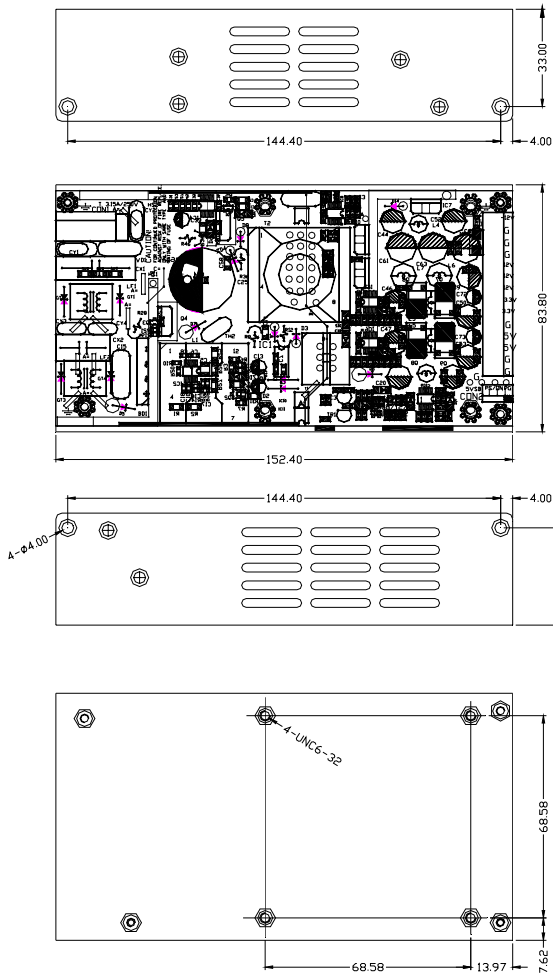

| | |
|-------|--------------------------------|
| P1 | Molex 39-01-2200 or equivalent |
| P3,P4 | Molex 8981-04P or equivalent |
| P2 | Molex 88751 or equivalent SATA |

Notes

- Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheet are no longer controlled by Enhance Electronics, refer to <http://www.enhanceusa.com> for the most current product specifications.
- Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured.
- Mechanical drawings (model No. ENO-1612) is for reference only. The cable wire configuration may vary from other custom designed models as picture showing. Please contact your sales representative for detail.
- Specifications are for reference only. All specifications are measured at an ambient temperature of 25°C, humidity 65%, 230Vac nominal input voltage and at rated output load unless otherwise specified.