

ATX-1136H-PDB-R

• **360W**



Features

- ATX12V Rev. 1.3 & ATX Backward Compliant
- POST Built-In for easy troubleshooting
- SATA HDD power connector built-in
- High Efficiency
- Power good TTL Signal, Remote On/Off
- Short Circuit, Over Current & Voltage Protection
- Safety Compliant
- IAPC, Wake-On-LAN Technology Ready
- Auto-Sensing Thermal Control
- Low Acoustic Noise

Apply For

- All Intel Processors up to P4-HT
- All AMD Processors up to Athlon 64/FX



Electrical Specifications

- Input Voltage 115 ~ 230 VAC
Manual Select
- Frequency 50 ~ 60 Hz
- Input current 8.0 Arms @ 115 VAC
4.5 Arms @ 230 VAC
- Holdup Time > 14 ms @ Full Load

Environmental Specifications

- Operating/Storage Temp. 10~50°C/-20~60°C
- Operating/Storage Humidity 85% / 95%
- Operating/Storage Altitude 10,000/50,000 FT
- MTBF 100,000 HRS
- Safety Approvals UL/CUL, CB, TUV
- EMC Regulations FCC, CE

Output Specifications

Voltage	Regulation Load	Minimum Load	Maximum Load	Peak
+3.3V	+/-5%	0.3A	28.0A	--
+5.0V	+/- 5%	0.5A	35.0A	--
+12.0V	+/- 5%	1.0A	18.0A	20.0A
-12.0V	+/- 10%	0A	0.8A	--
+5 Vsb	+/- 5%	0A	2.0A	--




(*) Total maximum combines load output on +3.3V and +5V rail shall not exceed 230 Watts

ATX12V

ATX-1136H-PDB-R

• **360W**

Mechanical Drawing

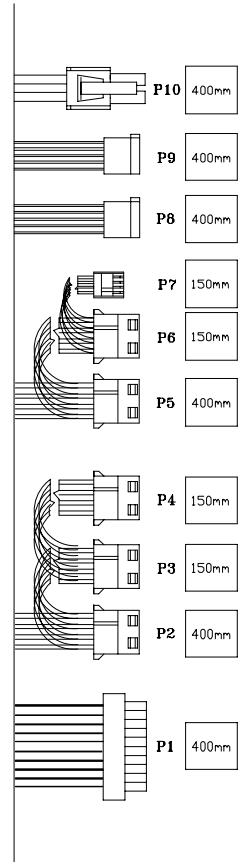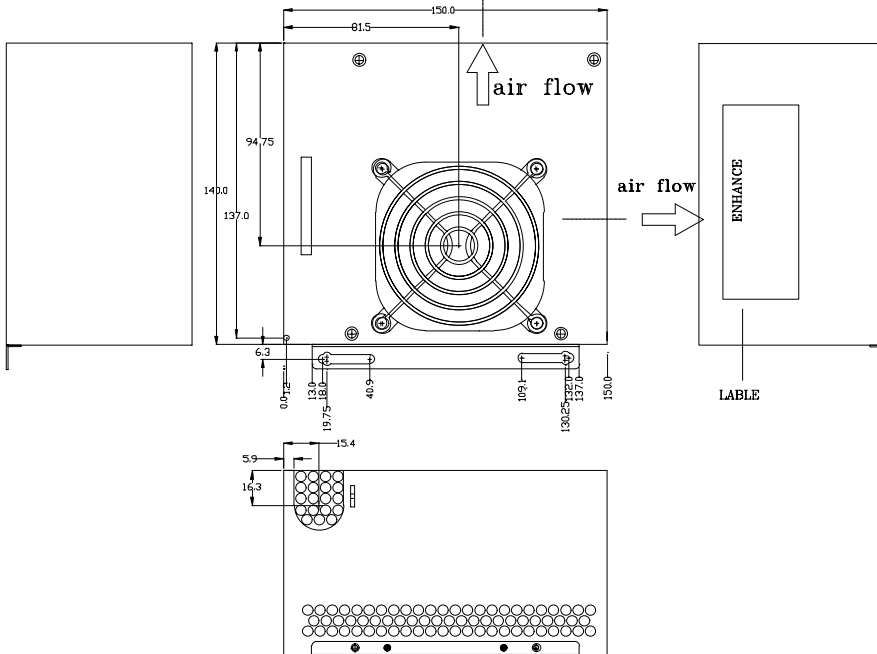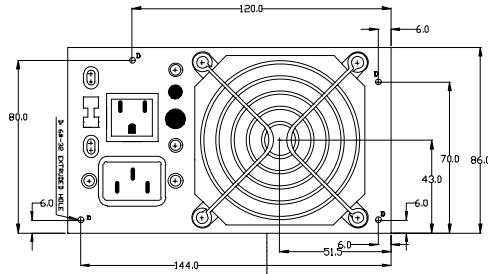

ATX12V


ATX-1136H-PDB-R

Wire Harness

• **360W**

Description

P1 - Main Power




Connector Housing

Molex 39-01-2200 or Equivalent

1	Orange	+3.3V	11	Orange	+3.3V
2	Orange	+3.3V	12	Blue	-12VDC
3	Black	GND	13	Black	GND
4	Red	+5V	14	Green	PS_ON
5	Black	GND	15	Black	GND
6	Red	+5V	16	Black	GND
7	Black	GND	17	Black	GND
8	Gray	PWR OK	18	NC	Reserved
9	Purple	5 VSB	19	Red	+5V
10	Yellow	+12V	20	Red	+5V

P10 – 4 Pin Processor Power



Molex 39-01-2040 or Equivalent

1	Black	GND	3	Yellow	+12V
2	Black	GND	4	Yellow	+12V


P2 to P6 – Peripheral



Molex 8981-04P or Equivalent

1	Yellow	+12V
2	Black	GND
3	Black	GND
4	Red	+5V


P7 – Floppy



AMP 171822-4 or Equivalent

1	Red	+5V
2	Black	GND
3	Black	GND
4	Yellow	+12V

P8 and P9 – Serial ATA



Molex 88751 or Equivalent

1	Yellow	+12V
2	Black	GND
3	Red	+5V
4	Black	GND
5	Orange	+3.3V

Dimension (WxLxH)

- 150 x 140 x 86 (mm)
- 5.9 x 5.5 x 3.38 (inch)

Cooling Fan

- 12V DC, 80mm x 2

Notes

•Specification subject to change without notice. All new processors support will be updated once official announced by vendors

•All company logo and legal name belong to original company. All copyright reserved by Enhance Electronics.

•One-Year Standard Warranty

•Last Update: 5/13/2005

ATX12V